

Editor-in-Chief B.E.Paton

Editorial board:

Yu.S.Borisov	V.F.Khorunov
A.Ya.Ishchenko	I.V.Krivtsun
B.V.Khitrovskaya	L.M.Lobanov
V.I.Kirian	A.A.Mazur
S.I.Kuchuk	Yatsenko
Yu.N.Lankin	I.K.Pokhodnya
V.N.Lipodaev	V.D.Poznyakov
V.I.Makhnenko	K.A.Yushchenko
O.K.Nazarenko	A.T.Zelnichenko
I.A.Ryabtsev	

International editorial council:

N.P.Alyoshin	(Russia)
U.Diltey	(Germany)
Guan Qiao	(China)
D. von Hofe	(Germany)
V.I.Lysak	(Russia)
N.I.Nikiforov	(Russia)
B.E.Paton	(Ukraine)
Ya.Pilarczyk	(Poland)
P.Seyffarth	(Germany)
G.A.Turichin	(Russia)
Zhang Yanmin	(China)
A.S.Zubchenko	(Russia)

Promotion group:

V.N.Lipodaev, V.I.Lokteva
A.T.Zelnichenko (exec. director)

Translators:

O.S.Kurochko, I.N.Kutianova,
T.K.Vasilenko, V.F. Orets
PE «Melnik A.M.»

Editor

N.A.Dmitrieva
Electron galley:
I.S.Batasheva, T.Yu.Snegiryova

Address:

E.O. Paton Electric Welding Institute,
International Association «Welding»,
11, Bozhenko str., 03680, Kyiv, Ukraine

Tel.: (38044) 287 67 57

Fax: (38044) 528 04 86

E-mail: journal@paton.kiev.ua

http://www.nas.gov.ua/pwj

State Registration Certificate
KV 4790 of 09.01.2001

Subscriptions:

\$324, 12 issues per year,
postage and packaging included.
Back issues available.

All rights reserved.

This publication and each of the articles
contained herein are protected by copyright.
Permission to reproduce material contained in
this journal must be obtained in writing from
the Publisher.

Copies of individual articles may be obtained
from the Publisher.

CONTENTS

SCIENTIFIC AND TECHNICAL

- Makhnenko V.I. and Kvasnitsky V.V.* Stress-strain state of
assemblies of the cylindrical shape in diffusion bonding 2
- Nesterenko N.P., Senchenkov I.K., Chervinko O.P. and
Menzheres M.G.* Simulation of temperature fields and stresses
in polyethylene pipes in hot-tool welding 7
- Getskin O.B., Erofeev V.A. and Poloskov S.I.* Simulation of the
process of electrode metal transfer in short-circuiting arc
welding 11
- Shlepakov V.N. and Naumejko S.M.* Peculiarities of
desulphurisation of weld metal in flux-cored wire welding 16
- Lazorenko Yu.P., Shapovalov E.V., Melnik E.S., Lutsenko N.F.
and Dolinenko V.V.* Efficiency of method for automatic
recognition of electrode imprints in spot welding of three-layer
honeycomb structures 19

INDUSTRIAL

- Sidlin Z.A.* Current status of welding consumables production
in Russia 23
- Barvinko A.Yu., Barvinko Yu.P. and Golinko V.M.* To the 60th
anniversary of industrial application of the technology of
manufacturing cylindrical tanks from coiled blanks 26
- Skulsky V.Yu. and Gavrik A.R.* Effect of carbon on phase
composition of weld metal of welded joints in martensitic steel
with 9 % Cr 28
- Khaskin V.Yu.* Application of laser-arc cladding for filling up
narrow cavities in aluminium alloy items 31

BRIEF INFORMATION

- Makarenko N.A., Chigarev V.V., Granovsky N.A.,
Bogutsky A.A. and Kushchy A.M.* Device for igniting arc of
double-anode plasmatron 35
- Tsykulenko K.A.* On the role of contact resistances in
electroslag cladding process 37
- News 40

NEWS

- International Conference «Welding and Related Technologies
into the Third Millennium» 42
- International Forum on Nanotechnologies 44
- Developed at PWI 15, 34, 41, 43, 45



STRESS-STRAIN STATE OF ASSEMBLIES OF THE CYLINDRICAL SHAPE IN DIFFUSION BONDING

V.I. MAKHNENKO¹ and V.V. KVASNITSKY²

¹E.O. Paton Electric Welding Institute, NASU, Kiev, Ukraine

²National Technical University of Ukraine «Kiev Polytechnic Institute», Kiev, Ukraine

The stress-strain state of assemblies of the sleeve-flange type, made from dissimilar materials by diffusion bonding, and regularities in formation of this state were studied by finite element computer modelling, allowing for the effect of plastic strains.

Keywords: diffusion bonding, sleeve-flange assembly, dissimilar materials, stress-strain state, computer modelling, plastic strains

Components of a cylindrical shape, made from dissimilar materials by diffusion bonding, are often used in machine building. Study [1] considers the stress-strain state (SSS) of assemblies of the cylinder-cylinder and sleeve-sleeve types in diffusion bonding. It is shown that under force and thermal loading the level of stresses within the bond zone dramatically changes even when the parts bonded have the same diameters. Bonding the sleeve-flange type cylindrical parts of different diameters leads to formation of a stress raiser in the sleeve-to-flange transition zone, which may have a substantial effect on SSS of the bond and its formation.

The purpose of this study was to investigate SSS of the sleeve-flange assemblies within the bond zone in diffusion bonding.

Modelling of SSS was carried out allowing for the effect of plastic strains. It is reported [2] that plastic strains can be subdivided into time-independent strains (instantaneous plasticity) and time-dependent ones (creep). The present study investigates instantane-

ous plasticity strains. Modelling of SSS within the elasticity theory frames is considered in study [3].

Investigations were conducted by the computer modelling method using software package ANSYS. Mises condition $\sigma_{eq} = \sigma_y$, where σ_{eq} are the equivalent (reduced) stresses, and σ_y is the yield stress, was taken as a criterion of formation of plastic strains. Results of the present study were compared with those obtained in study [4] dedicated to modelling of SSS in diffusion bonding of cylindrical parts containing no design stress raiser.

The investigations were carried out on the sleeve-flange bond samples and computation model (Figure 1). Variants of the combinations of materials properties are given in the Table. The strengthening modulus in plastic deformation for all materials was assumed to be equal to zero, except for model 1, where it was assumed to be equal to $1 \cdot 10^3$ MPa to provide stability of the solution.

The results of solving the plastic problems were compared with those of solving the elastic problems.

In model 1, loading was applied according to the classic scheme of diffusion bonding, i.e. uniform com-

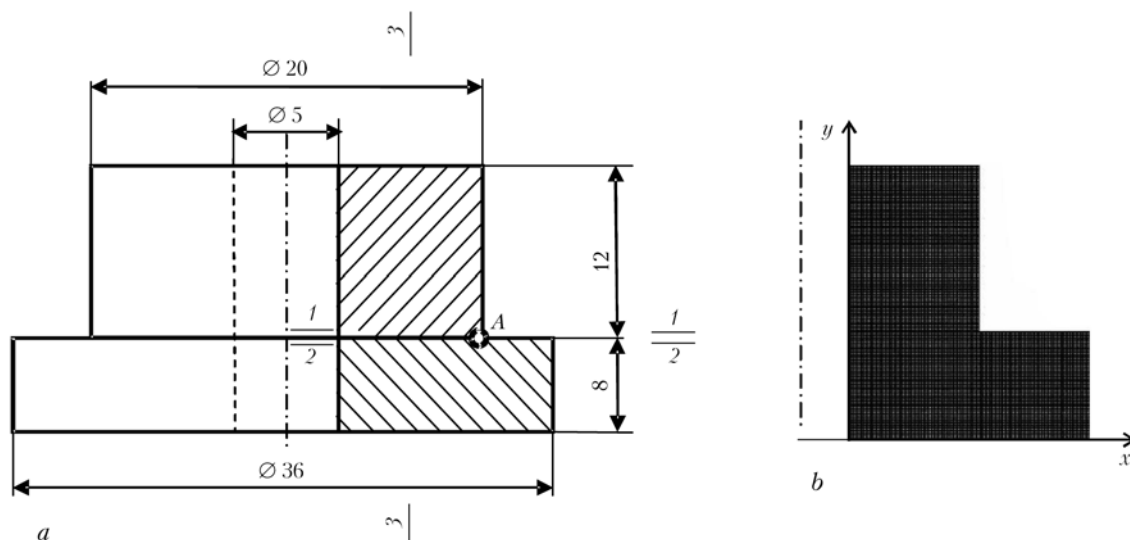


Figure 1. Schematic of the sleeve-flange assembly bond (a) and sections of finite element model (b)